

V2



Installation manual



Volkswagen 7-9inch Android

Are you ready to install our unit?

Let's go >>>

4 steps to install

STEP 01

Check

- 1) Do the screen is broken ?
- 2) Do the accessories have missing ?

STEP 02

Test your unit before a full installation.

(Connect the power cable to your car)

STEP 03

Do the full installation.

STEP 04

Test the head unit functions.

Accessories



- | | |
|------------------------------------|--------------------------|
| 1. External microphone *1 | 2. GPS antenna *1 |
| 3. Disassembly tool *1 | 4. Wi-Fi antenna *1 |
| 5. Canbus *1 | 6. USB Adapter Cable *1 |
| 7. 3M adhesive *1 | 8. 15A fuse *1 |
| 9. Reverse relay box *1 | 10. USB Adapter Cable *1 |
| 11. Radio antenna adapter cable *1 | 12. Power cable *1 |

(9. Remark : if your rear camera has flash problem due to a low voltage, you will need to reverse relay box to resolve it.)

STEP 02 Test your unit before a full installation.

(Connect the power cable to your car)

1. Double check the size and shape of the center console panel.

VW Passat



VW Jetta



VW EOS



VW polo



2. The methods of old radio removal for them are mostly the same. Firstly, need to remove the cover of the old radio with disassembly tool.



3. After that you will discover the each bolts of old radio, then unscrew them, you can pull the whole unit out.




(Remark : In some VW models, the upper bolts may be hidden under the air vents, you need to open the air vents to explore it.)



Now you can take out the power cable to connect the head unit and then try to turn it on. If this part is no problem, you can do the remain steps.

STEP 03 Do the full installation.

4. Connect those wires provided in the package like (1) Power cable with canbus, (2) USB cable, (3) Radio antenna adapter cable, (4) GPS antenna, (5) Wi-fi antenna and (6) External microphone as shown.

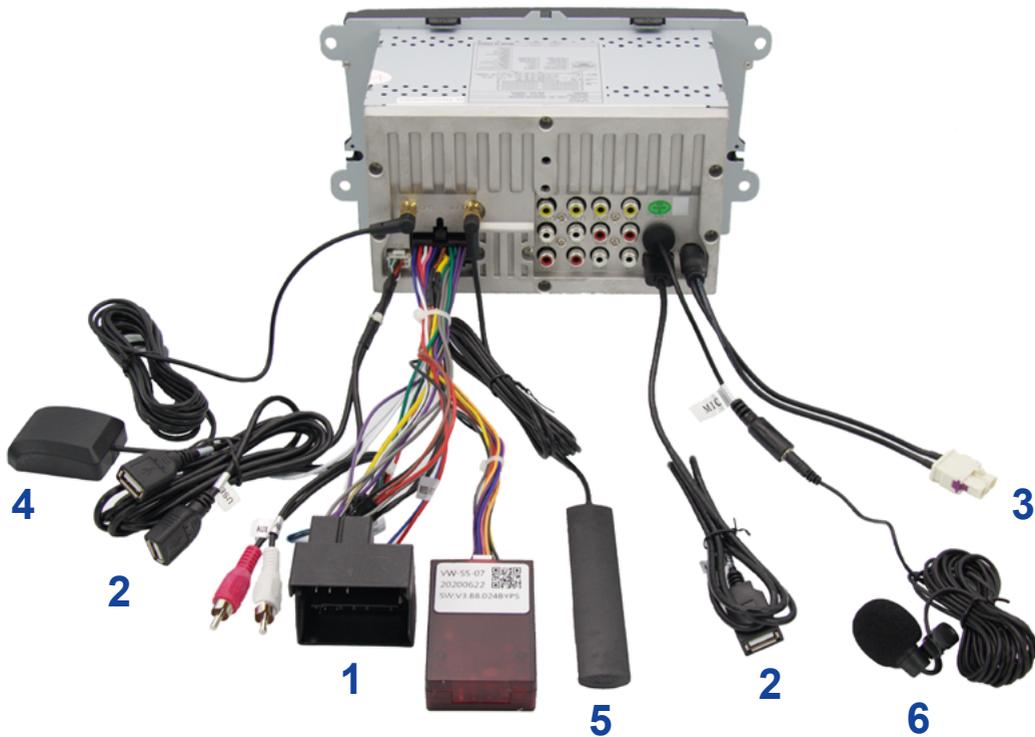


Wiring diagram

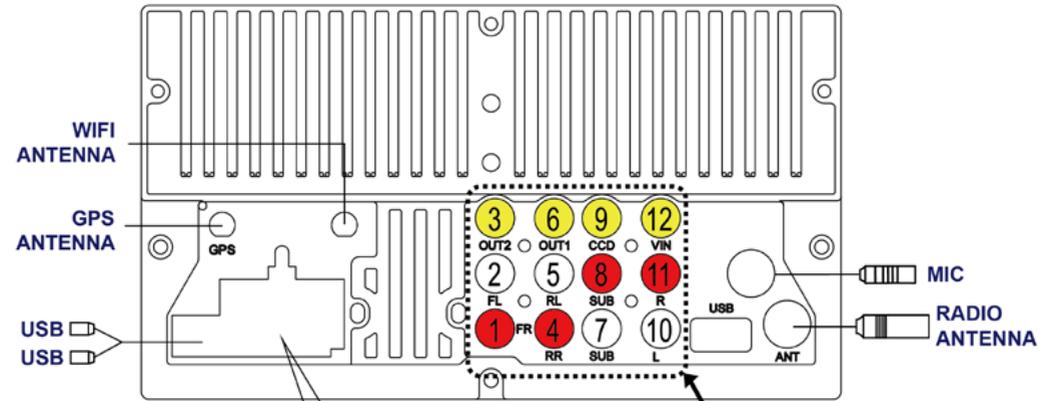

- 1. (FR) FRONT RIGHT AUDIO OUTPUT (RED)
- 2. (FL) FRONT LEFT AUDIO OUTPUT (WHITE)
- 3. VIDEO 2 OUT (YELLOW)
- 4. (RR) REAR RIGHT AUDIO OUTPUT (RED)
- 5. (RL) REAR LEFT AUDIO OUTPUT (WHITE)
- 6. VIDEO 1 OUT (YELLOW)
- 7. SUB OUT (WHITE)
- 8. SUB OUT (RED)
- 9. REAR CAMERA INPUT (YELLOW)
- 10. (L) CH INPUT (WHITE)
- 11. (R) CH INPUT (RED)
- 12. VIDEO IN (YELLOW)


- 1. Power amplifier control
- 2. Steering wheel control 2
- 3. Steering wheel control 1
- 4. Brake wire
- 5. Auto antenna power
- 6. Rearview control wire
- 7. Rear left speaker-
- 8. Rear left speaker+
- 9. Rear right speaker-
- 10. Rear right speaker+
- 11. CANBUS TX (IR)
- 12. CANBUS RX (GND)
- 13. ILLUMI
- 14. Accessory
- 15. Ground
- 16. Power+12V
- 17. Front left speaker-
- 18. Front left speaker+
- 19. Front right speaker-
- 20. Front right speaker+

5. Plug the head unit into the center console, then place the GPS antenna and microphone as shown. The wires are hidden in the side of pillar trim and led to the head unit.

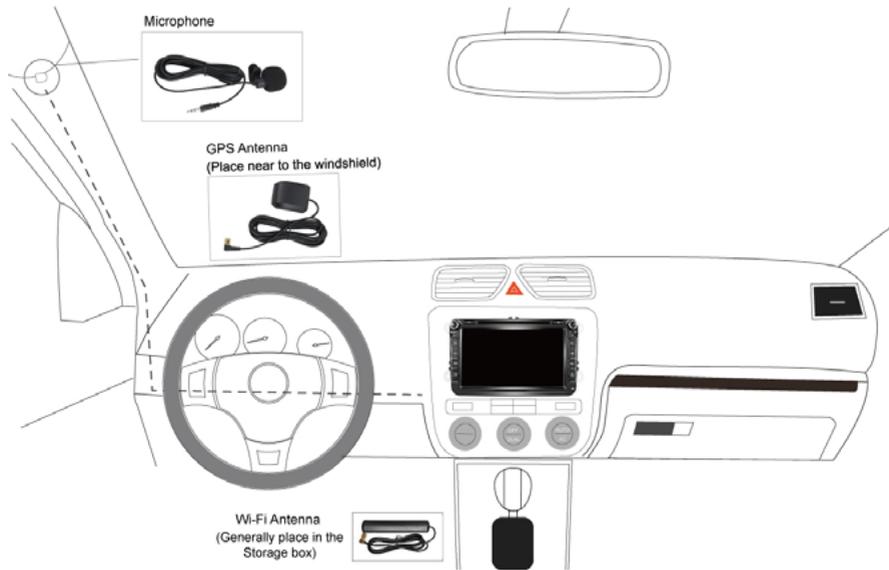


Wire connection for the amplifier, the subwoofer and the headset monitors

Case 1: The subwoofer connects to the head unit

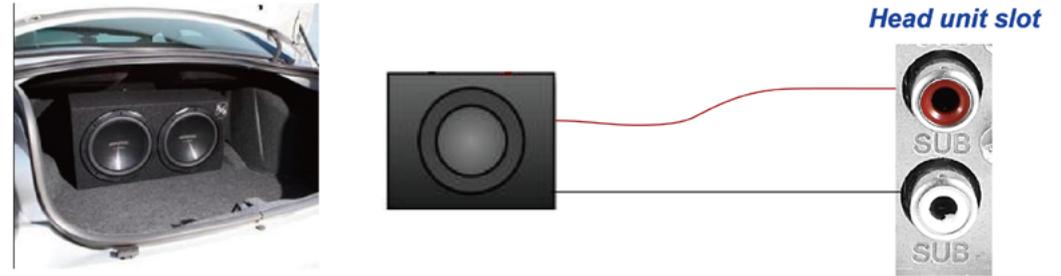

Case 2: The 2/4 speakers with an amplifier are connected to the head unit.

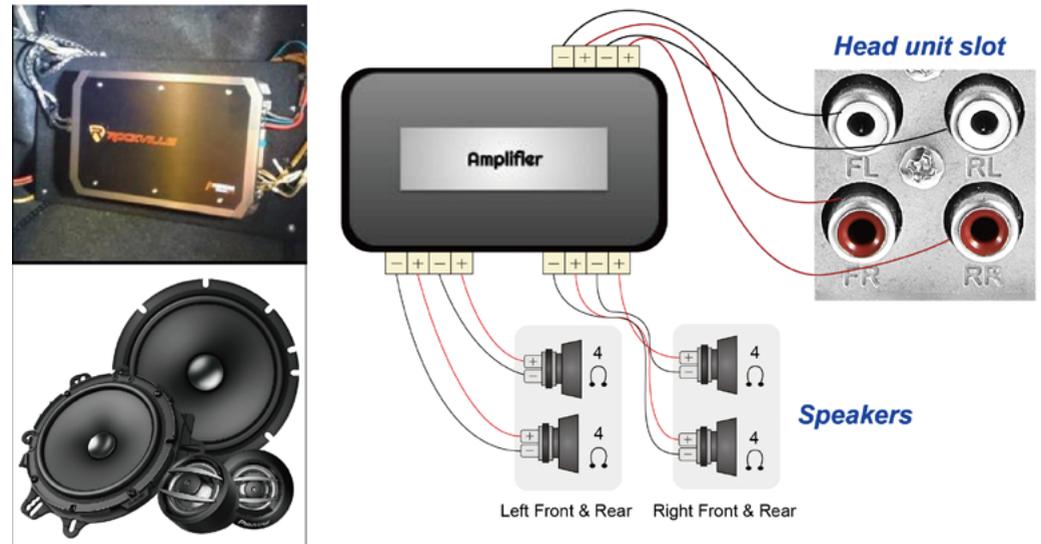


STEP 04 Test the head unit functions.


(FM, SD, USB, Bluetooth, reversing, handbrake, headlight, steering wheel control and etc)



Case 3: The 2/4 speakers with an amplifier and the subwoofer with an amplifier are separately connected to the head unit.

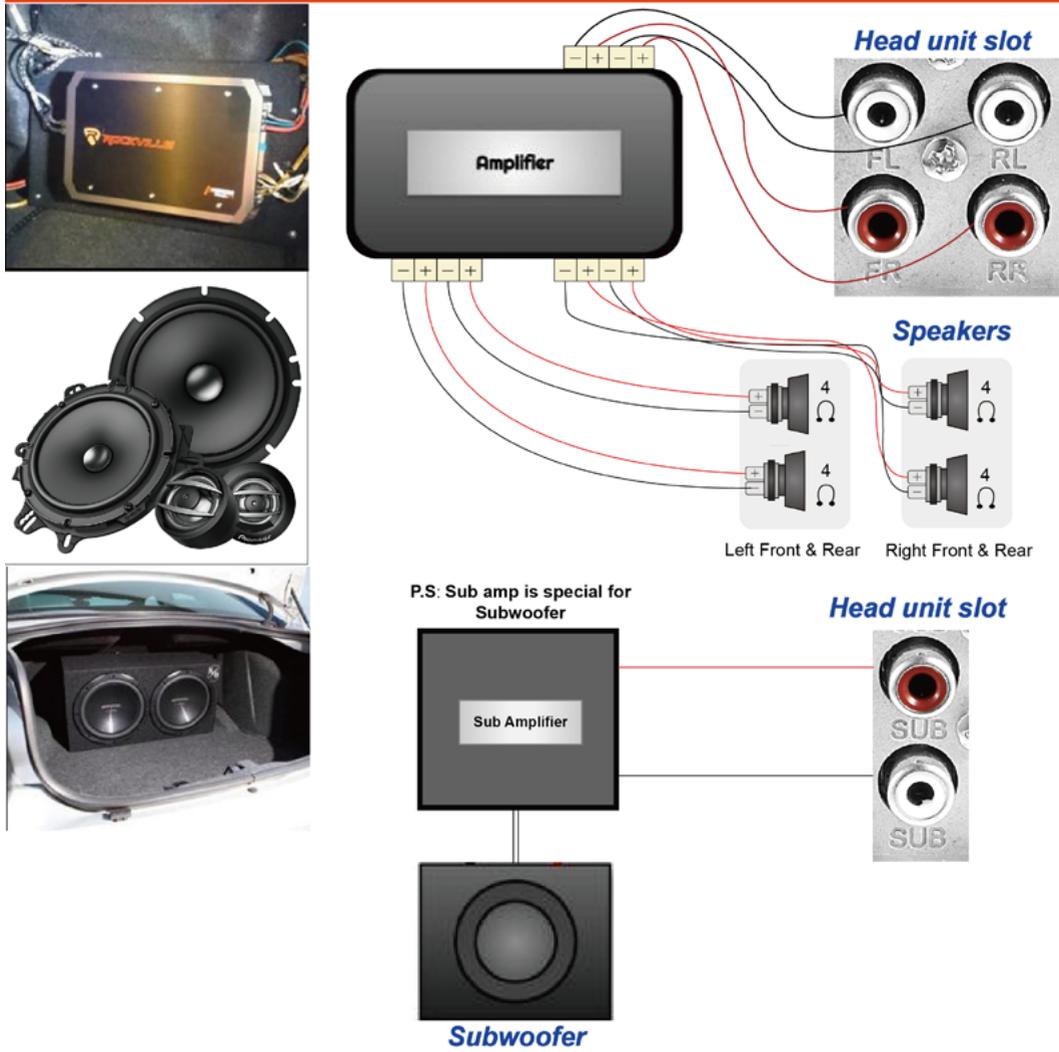


Case 4: The headrests monitors are connected to the head unit

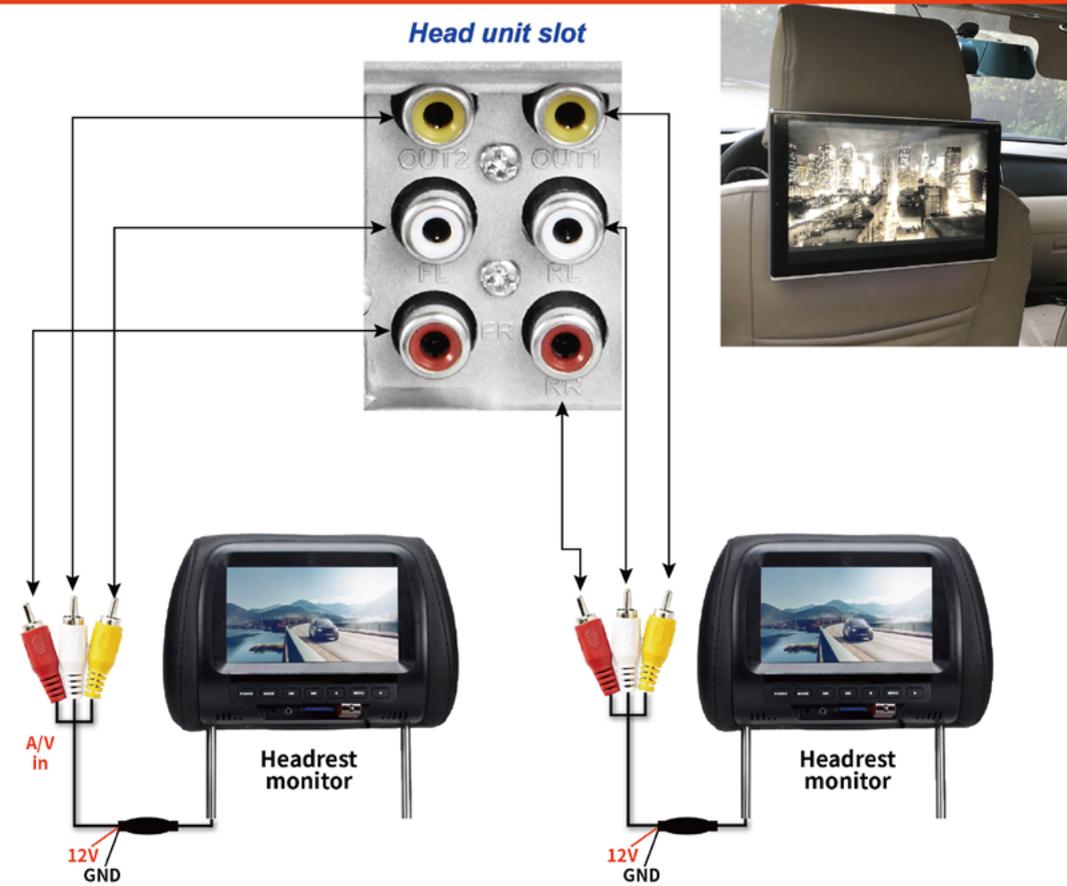

Except for connecting the amplifier, the slot of FL, FR, RL, RR also are used for connecting the headrest monitors.

Optional : Install a rear camera


Below is our rear camera. This will be a reference to teach you how to connect a rear camera to our head unit.

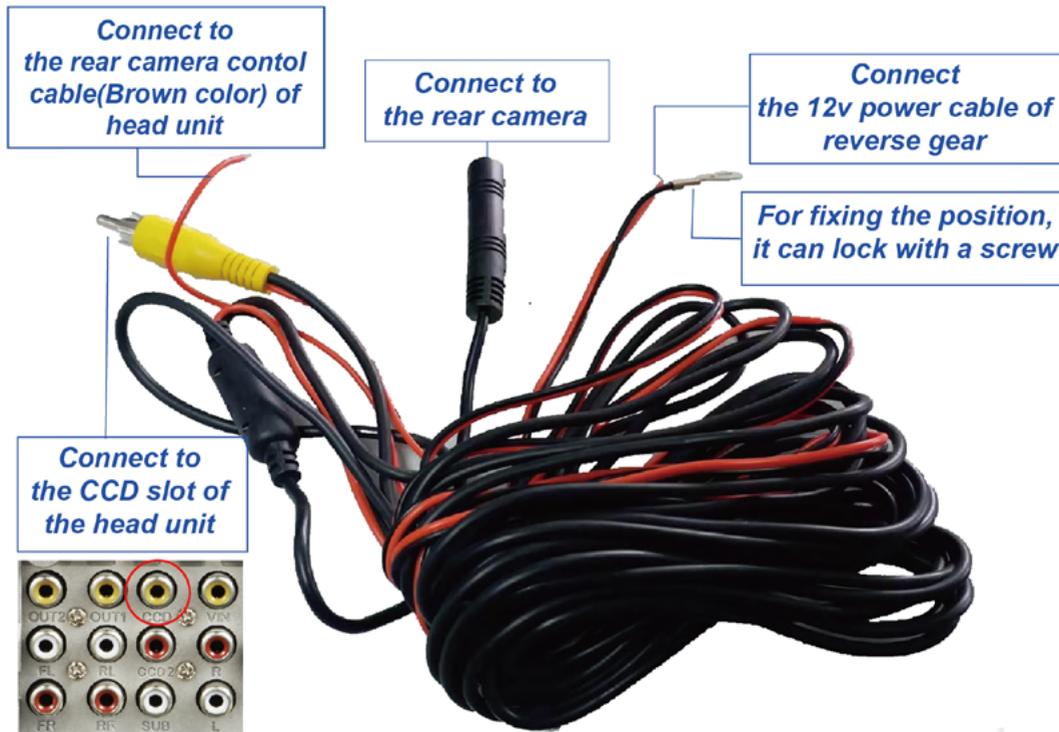

The ASIN of this rear camera has placed in the listing.




Remark : If your rear camera happen the flash problem (Like above), the reason may relate to the low voltage. To resolve the issue, you will need to install the reverse relay box.

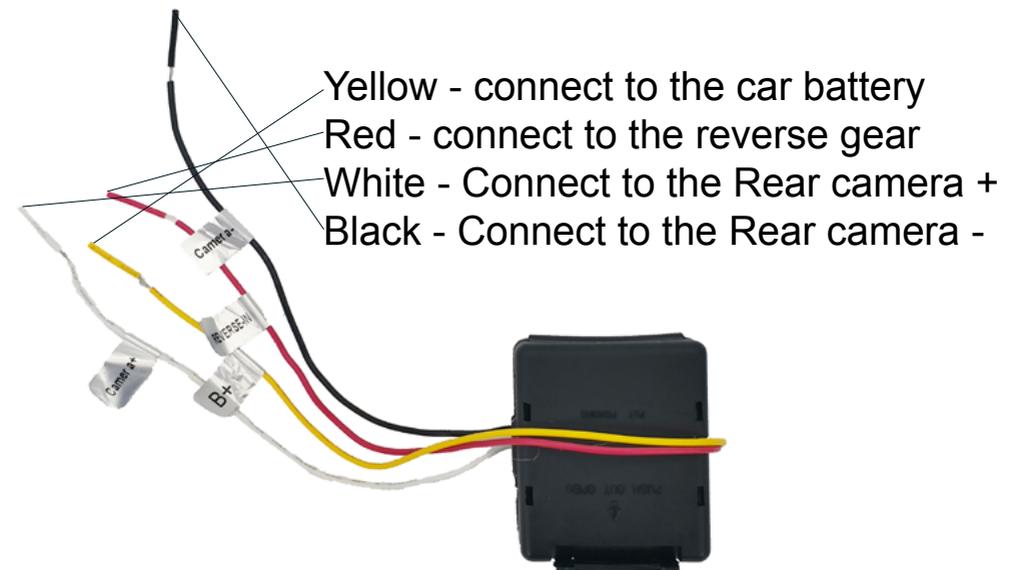

System Initial setup

1 Set radio location

The default radio country in the unit is Europe, if you are from other country, you need to access the "factory mode (PW: 126) > Radio" to adjust the country.

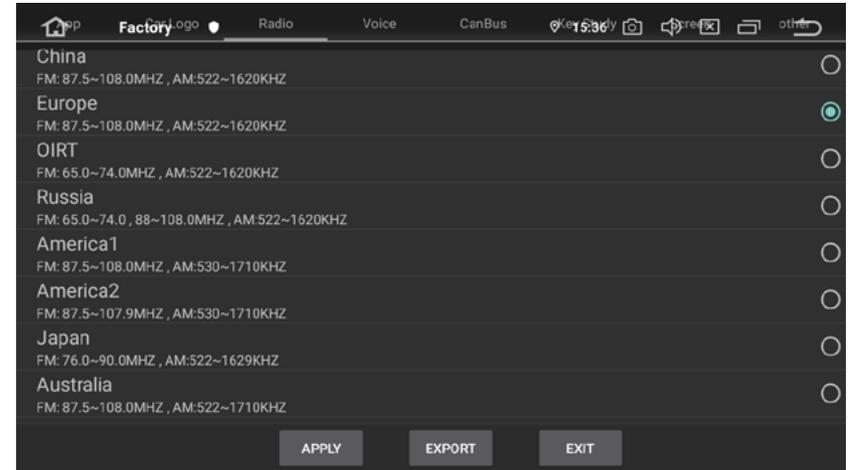


2 Set RDS

The Radio has RDS function but this function is only for Europe, if the clients from other countries use it, it will affect the radio reception, so please close it.




Wire connection of reverse relay box

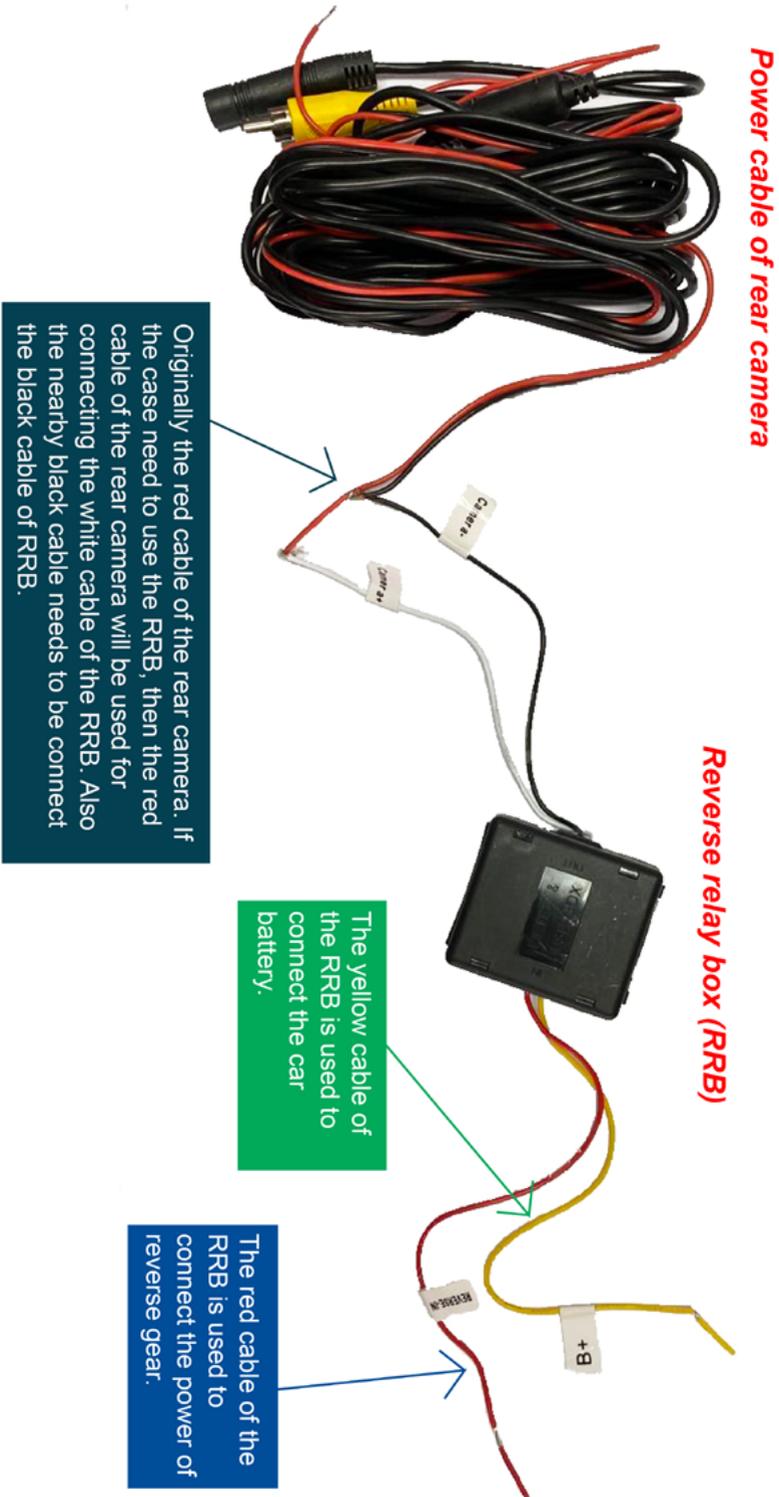

3 Set the unit language

Please go to setting > Languages & input, then you can add the desirable language you need.

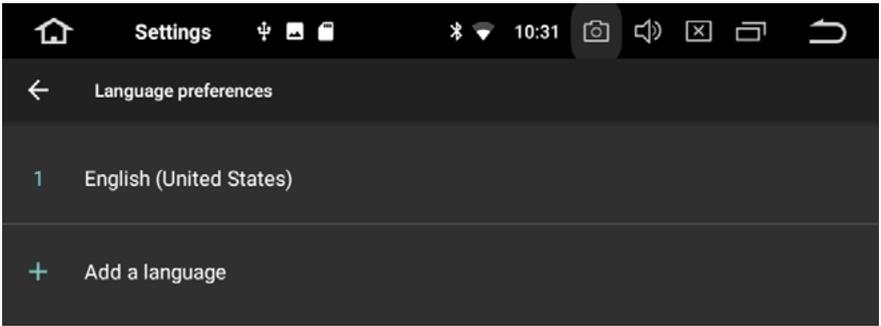

About after sales service

Q: Do my head unit has one year maintenance?

A: Definitely yes, you will have our commitment after you purchase.

(The maintenance period will base on the date you make the order)