

Installation manual



Audi A4 7inch Android

Are you ready to install our unit? Let's go >>>

5 steps to install

STEP

STEP

If your Audi A4 car has been built in the amplifier, you must read it.

Check1) Do the screen is broken ?2) Do the accessories have missing ?

STEP Test your unit before installing into your car
(Connect the power cable to your car)

STEP Test the head unit functions. If your Audi A4 car has been built in the amplifier, you must read it.

This Audi A4 comes in three flavors of factory radios and this will impact your install. *Especially Case 2 & 3*, if you don't find the guide to do that, *the speakers may outcome no sound.*

Case 1 - No factory amplifier

This radio will be *plug-and-play*. No fix required.

"The factory Audi amp requires a higher voltage than standard aftermarket radios produce, so that you will need a line out level to boost the rear RCA voltage."

Case 2 - Partial (rear/sub) amplification

Front speaker wiring remains unchanged, rear speakers/sub will require a *line out level* to RCA converter. Custom wiring to the included wire-harness required.

Case 3 - Full amplification

Front AND rear/subs will require a *line out level* to RCA converter. Custom wiring to the included wire-harness required. You will need to purchase two converters (for front and rear) because each adapter is only 2 channels.



Remark:

It isn't our product. This part is recommended by our client. You can find it on Amazon.

Line out level

Accessories



- 1. External microphone * 1
- 3. Wifi antenna *1
- 5. Canbus *1
- 7. 15A fuse *1
- 9. Disassembly tools *4
- 11. Radio Antenna connector *1 12. USB adapter cable *1
- **13.** USB adapter cable *1

- 2. GPS antenna *1
- 4. Disassembly Key *1
- 6. Antenna adapter *1
- 8. 3M adhesive *1
- 10. Power cable *2
- 14. USB adapter cable *1

STEP
03Test your unit before installing
into your car
(Connect the power cable to your car)

1. Double check the size and shape of the center console panel.



2. Prepare the disassembly 3. Insert the DT into the small holes tools. (DT) of each corners on the factory unit.







5. Then you can totally pull out the factory unit with the DT.



6. Unplug all cables from the factory unit.




7. Remove the surrounding cover with disassembly tools, release more space for connecting the cables.




Now you can take out the power cable to connect the head unit and then try to turn it on. If this part is no problem, you can do the remain steps.

STEP Do the full installation.


8. Connect those wires provided in the package like (1) Power cable with canbus, (2) USB cable, (3) Radio antenna adapter cable, (4) GPS antenna, (5) Wi-fi antenna and (6) External microphone as shown.

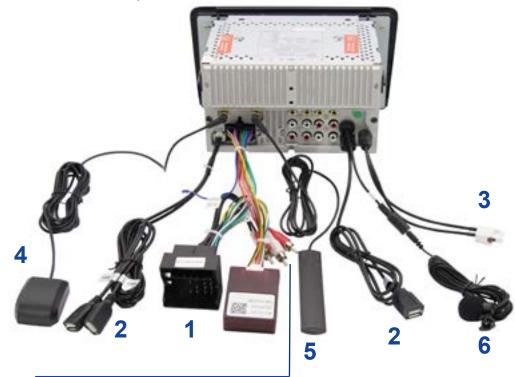



If your car has built-in the factory amplifier, you need to connect the red and white cable on the power cable to the red and white plug of head unit.

Wiring diagram

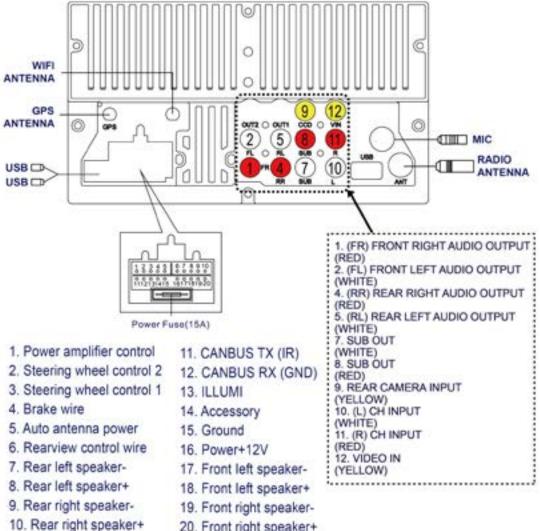

20. Front right speaker+


15. Plug the head unit into the center console, then place the GPS antenna and microphone as shown. The wires are hidden in the side of pillar trim and led to the head unit.




STEP 05 Test the head unit functions. (FM, SD, USB, Bluetooth, reversing, handbrake, headlight, steering wheel control and etc)




Wire connection for the amplifier, the subwoofer and the headset monitors




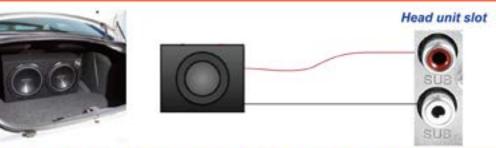

Case 2: The 2/4 speakers with an amplifier are connected to the head unit.

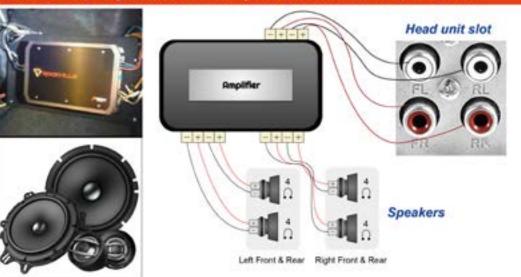

Case 3: The 2/4 speakers with an amplifier and the subwoofer with an amplifier are separately connected to the head unit.

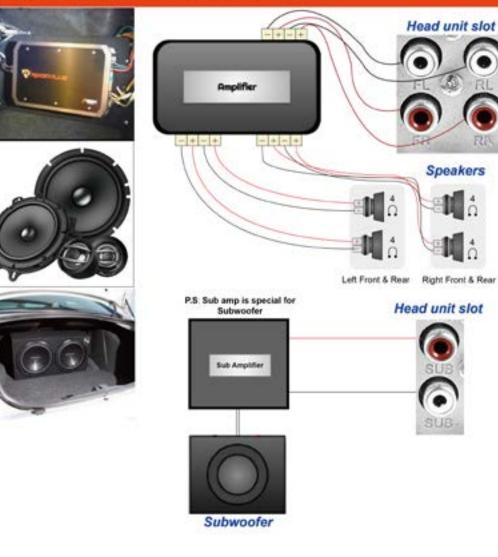

Optional : Install a rear camera

Our main unit only syncs the rear camera but not the front camera.





Cable connection



The ASIN of this rear camera has placed in the listing.

System Initial setup

Set radio location

The default radio country in the unit is Europe, if you are from other country, you need to access the "factory mode (PW: 126) > Radio" to adjust the country.

10 ^{re}	Factory ton •	Reto		Cestion	F-15367 (2)	000	
China							0
	106.0MHZ_AM(\$22-1	620042					
Europe	108 0MPLE _AMS22-1	iminar					۲
OIRT							0
	TEOMOR AMIDZ-18	20642					0
Russia							0
	74.0 88-108 OMHZ .	AM 522-182949	¢.				
Americ							0
Americ	108.0MHZ , AM 530-1	noor					
	107.1MHZ_AM330-1	7100HZ					0
Japan							0
	90.0MHZ_AM522-16	2002					0
Austral							0
PME87.5-	108.0MH2 , AM1522-1	710012					1.172
		ATT	90 II	DUPONT	DOT		

Set RDS


2

The Radio has RDS function but this function is only for Europe, if the clients from other countries use it, it will affect the radio receival, so please close it.



3 Set the unit language

Please go to setting > Languages & input, then you can add the desirable language you need.

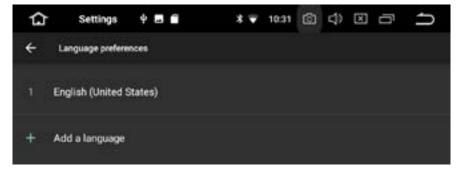

About after sales service

Q: Do my head unit has one year maintanence? A: Definitely yes, you will have our commitment after you purchase.

(The maintainence period will base on the date you make the order)